



BID PACKET
USFS Telephone Fence Building

(Project A, B and C)

July 2026





USFS Telephone Fence Building (Project A, B and C)

July 2026

There are multiple sections of fence in the Telephone Fire that need to be replaced. All fences should be replaced due to age and fire damage. If we cannot fully replace it all, replace what we can and fix the remainder. There are some wooden post and H braces that have been burned, these sections must be replaced with “like material”, some down fences, and some weak wire.

Access to the Work: See vicinity and project maps. ATV’s/UTV’s and skid steer are allowable for the purpose of fence construction. There is about 14.05 miles of fence total, broken down into three projects A, B and C. (Maps Below) All fence lines will go back in the exact same spot. All old wire and unused posts must be removed from project. Contractor is allowed to reuse t-posts from existing fence. Contractor is responsible for purchasing all material.

Description of Work:

1. 6.00 miles of 4-wire all steel fence

Fence type: 4- Wire Fence, All Steel post

Wire spacing dimensions in inches above the ground:

D: 42"

C: 30"

B: 22"

A: 16"

Line posts spacing (L): 22 ft 0 inches

Type of mechanical gate closers: Pipe and

Chain

Type of top wire: Barbed

Type of intermediate wires: Barbed

Type of bottom wire: Barbless

Stay spacing: 7 ft 4 inches.

Length of steel posts: 5 ft 6 inches

Depth of steel posts in ground: 18 inches

Type of stress panels: Double steel post

Type of corner panels: rock crib or metal pipe h-braces/ replace wooden braces with Wooden braces

Type of gates: 5-wire

A mandatory bid meeting is scheduled for July 8, 2026.

Expect at least an hour bid tour, meeting at the HSWCD office at 8:00 am.


ALL SEALED BIDS (MAILED, HAND DELIVERED, OR EMAILED), ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: **12:00 pm, On Tuesday, July 21th, 2026**

Contents of bid packet must be returned with bid sheet.


Estimated Start Work Date: **upon completion of ROW clearing**

Contract Completion: **All units to be complete by December 31, 2026**


Forest Service Location Map

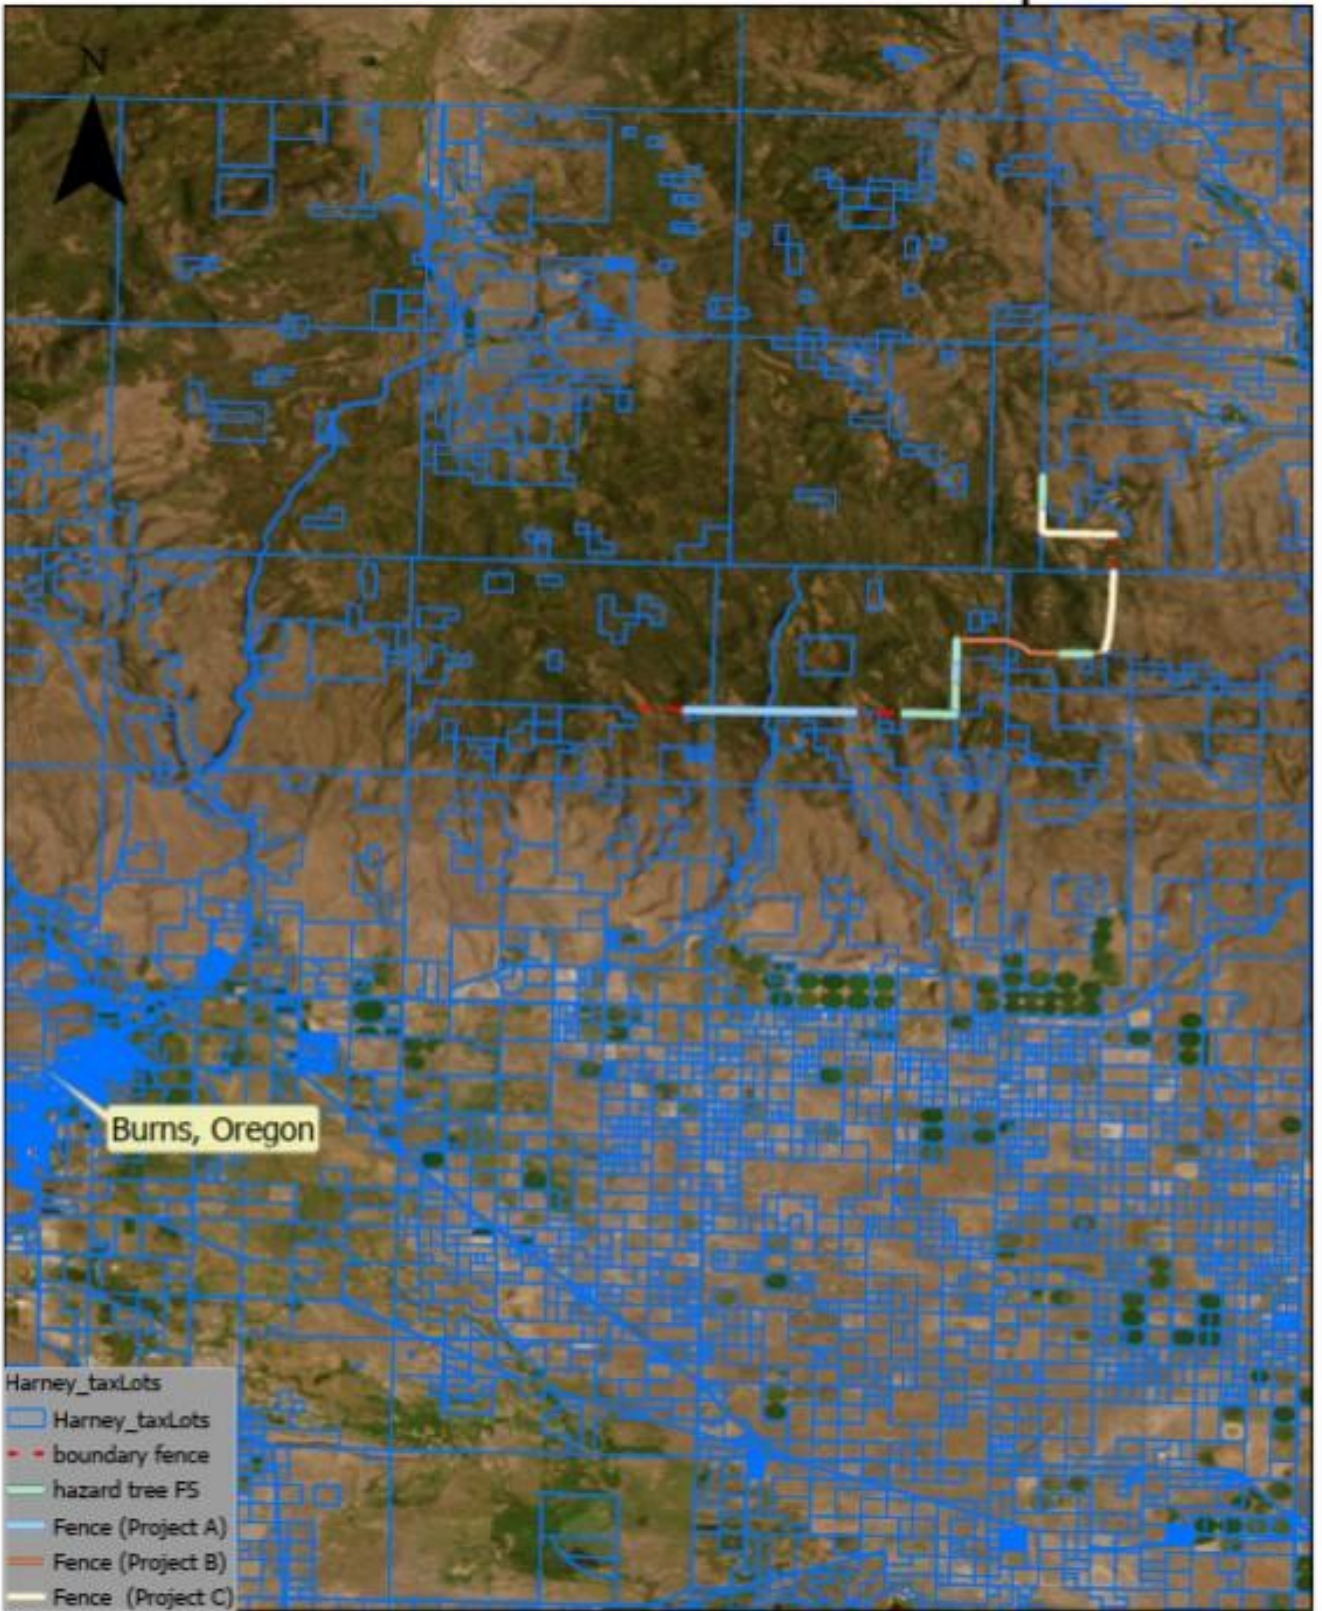

Harney CWMA
Tyler Goss
6/17/2026




Forest Service Project A

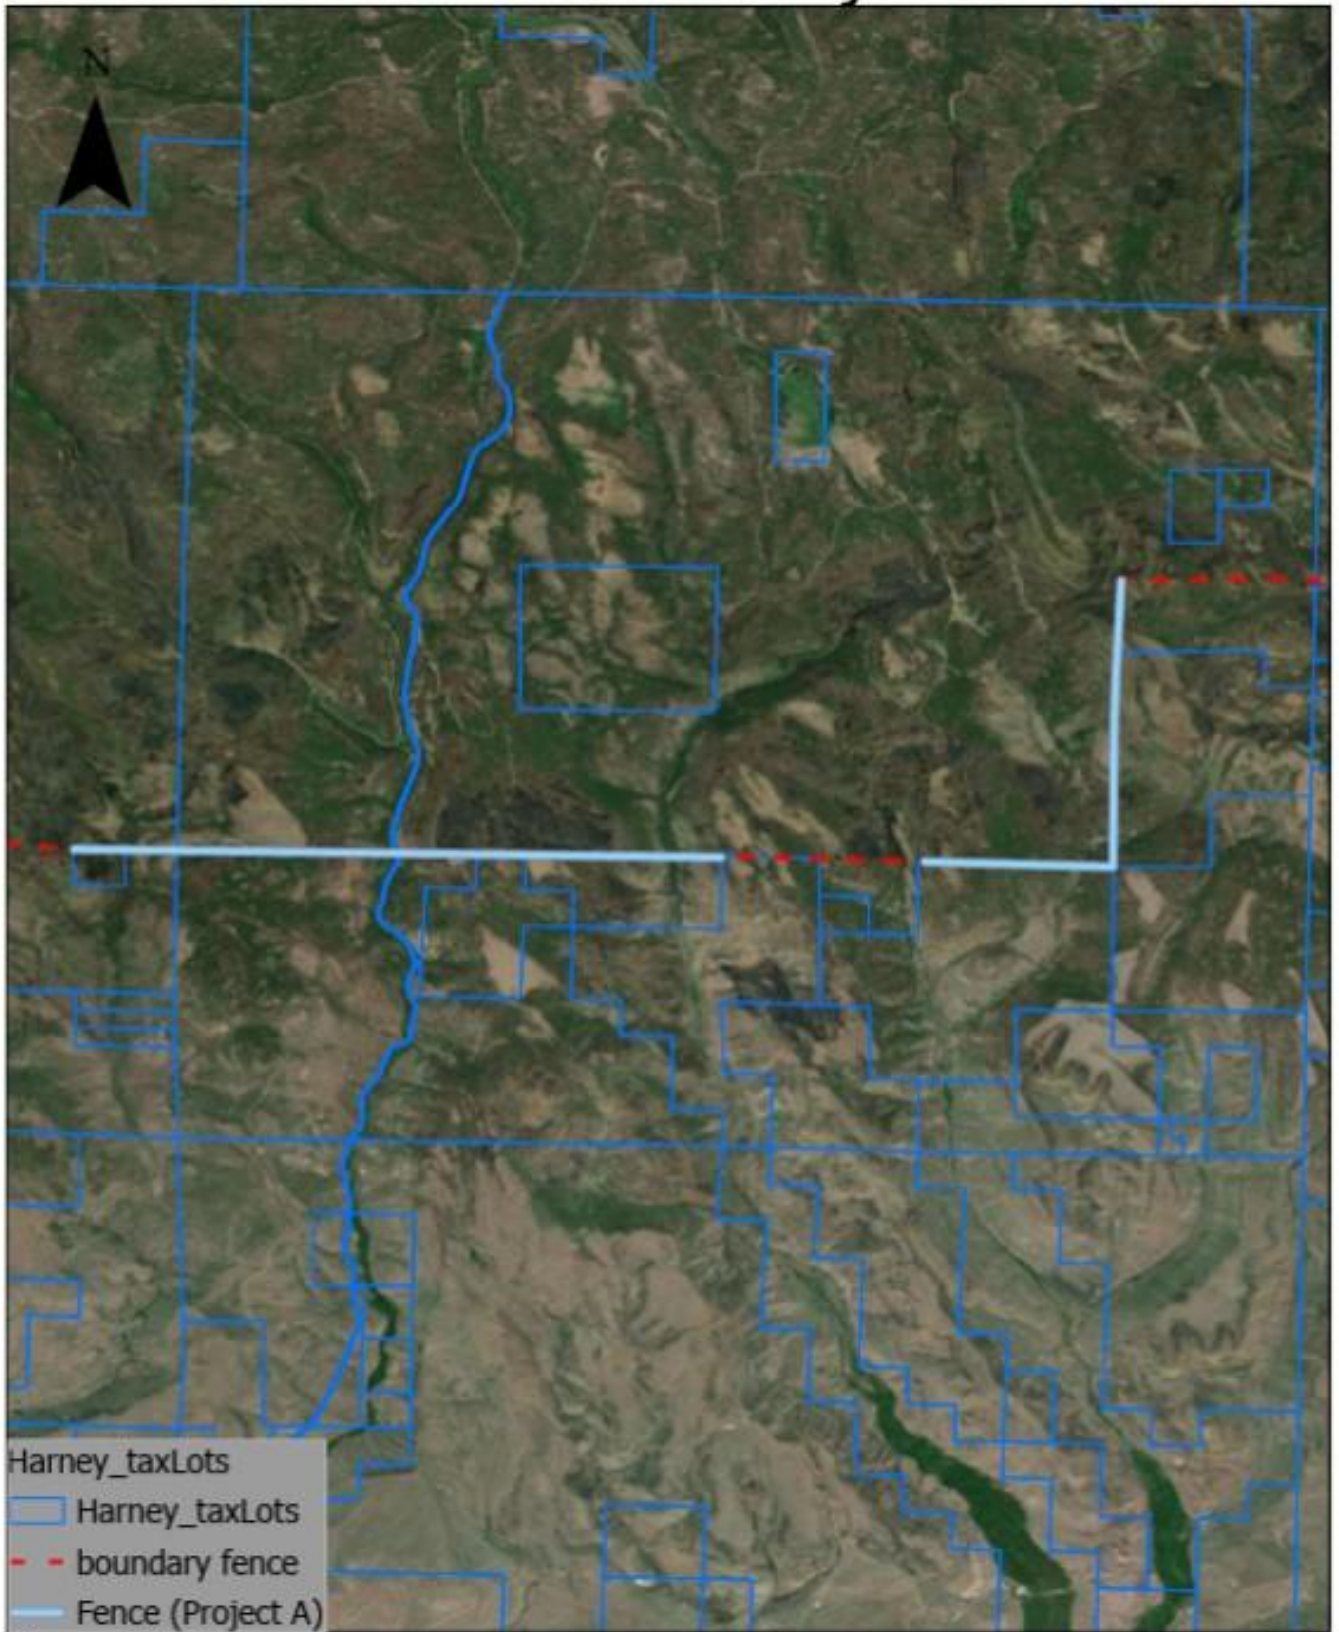


- Harney_taxLots
- Harney_taxLots
- - boundary fence
- Fence (Project A)

Harney CWMA
Tyler Goss
6/17/2026




Forest Service Project B

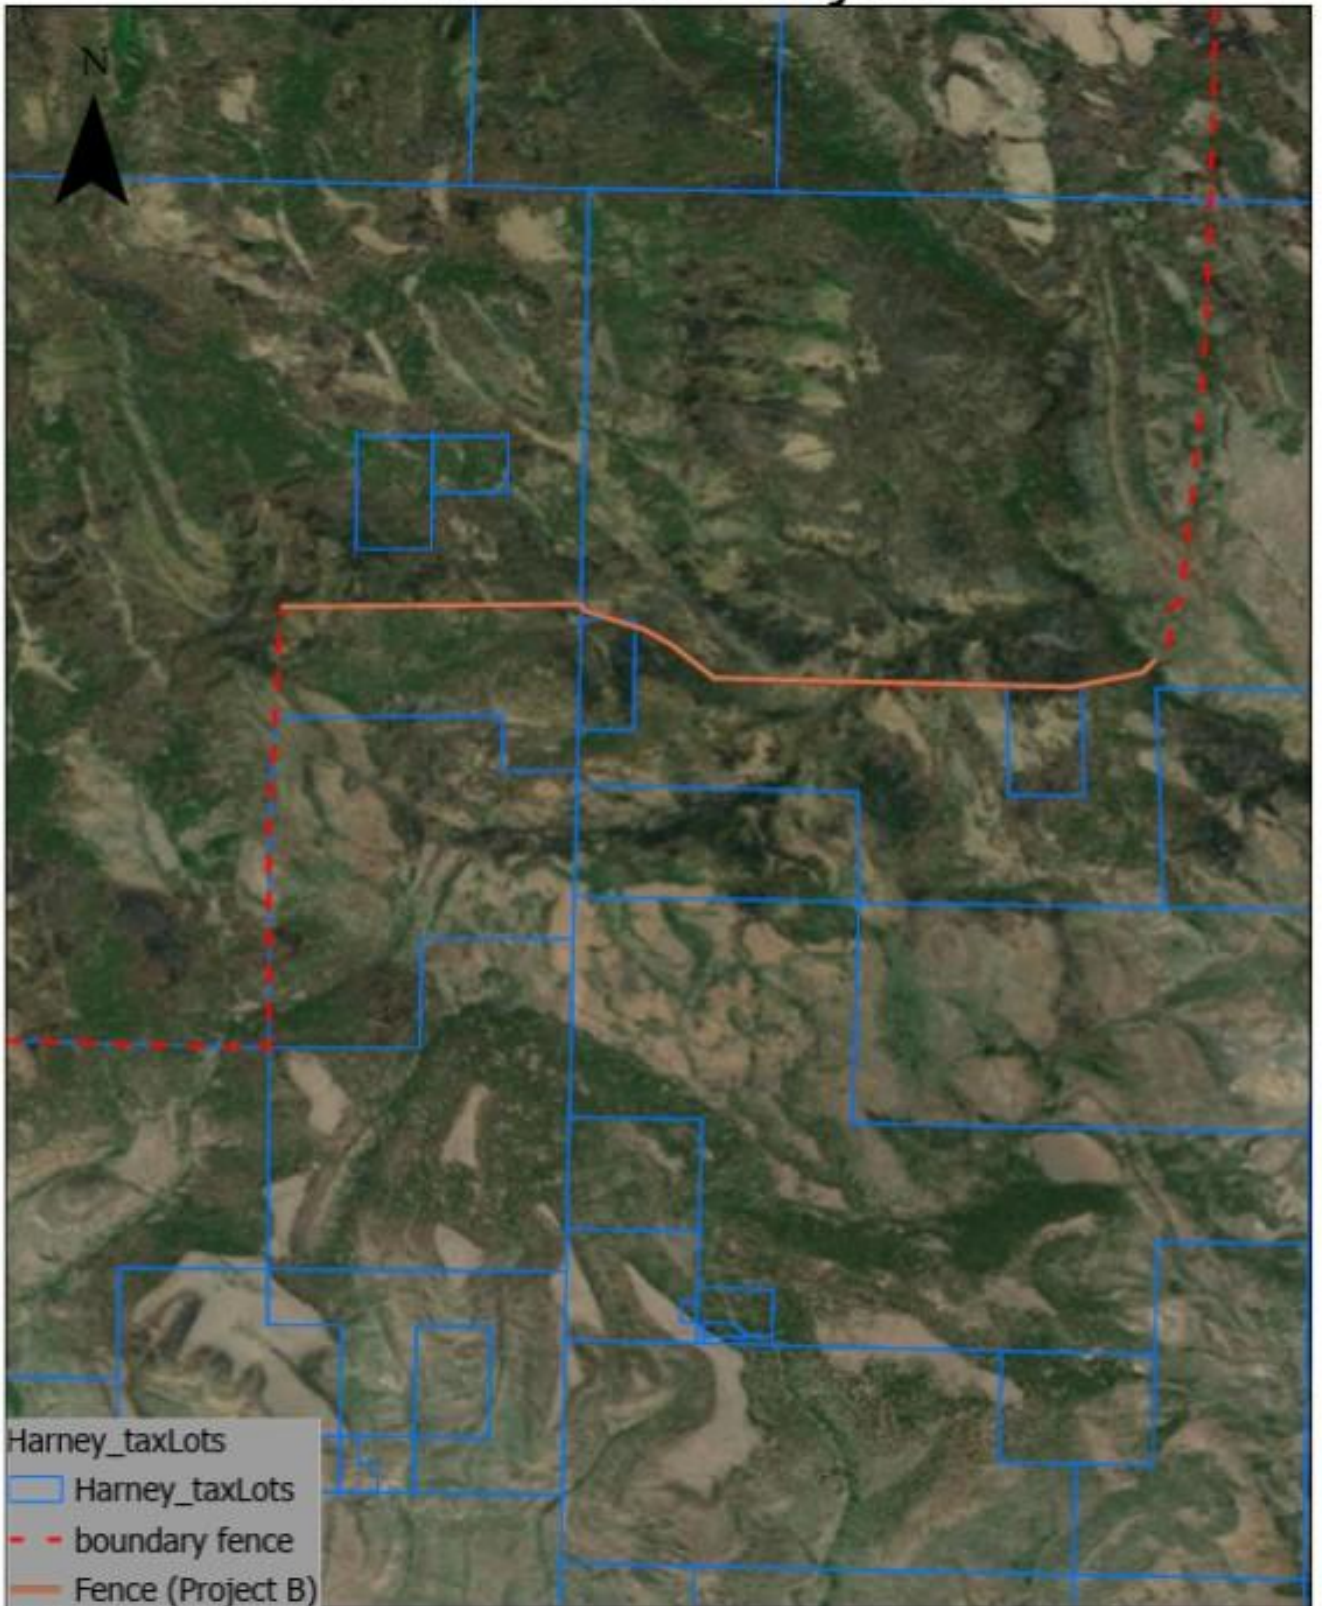

Harney_taxLots
Harney_taxLots
- - boundary fence
Fence (Project B)

Harney CWMA
Tyler Goss
6/17/2026



Forest Service Project C



- Harney_taxLots
- Harney_taxLots
- boundary fence
- Fence (Project C)

Harney CWMA
Tyler Goss
6/17/2026

