



**Harney SWCD
P.O Box 848
530 Highway 20 South
Hines, Oregon 97738
Phone 541-573-6446**

REQUEST FOR BID

***** This is not an order*****

Return sealed bid to:

Harney Soil and Water Conservation District office by:

Wednesday, September 23, 2026 at 12:00 pm

Description: (attached)

Please attach Vendor bid to the Harney SWCD "Request for Bid" and sign the front page.

Must be completed by May 1, 2027

Contract:

Tyler Goss @ 541-573-6446 ext 4, Cell 541-891-0898

Vendor Name: _____ Fed ID#: _____

Address: _____ Phone: _____

City, State, Zip: _____ Fax: _____

Signature of vendor Contract: _____



BID PACKET
USFS Falls Fire Boundary Fence Building

September 2026





USFS Falls Fire Boundary Fence Building

September 2026

There are multiple sections of fence in the Falls fire that need replacement. All fences should be replaced due to age and fire damage. If we cannot fully replace it all, replace what we can and fix the remainder. There are some wooden posts and H braces that have been burned; these sections must be replaced with “like material”, some down fences, and some weak wire.

Access to the Work: See vicinity and project maps. ATVs/UTVs and skid steer are allowable for the purpose of fence construction. There is about 7.51 miles of fence total. All fence lines will go back in the same spot. All old wire and unused posts must be removed from the project. The contractor is allowed to reuse T-posts from the existing fence. The contractor is responsible for purchasing all material.

Description of Work:

1. 7.51 miles of 4-wire all-steel fence

Fence type: 4-wire fence, all-steel posts

Wire spacing dimensions in inches above the ground:

D: 42"

C: 30"

B: 22"

A: 16"

Line post spacing (L): 22 ft 0 inches

Type of mechanical gate closers: Pipe and Chain

Type of top wire: Barbed

Type of intermediate wires: Barbed

Type of bottom wire: Barbless

Stay spacing: 7 ft 4 inches

Length of steel posts: 5 ft 6 inches

Depth of steel posts in ground: 18 inches

Type of stress panels: Double steel post

Type of corner panels: rock crib or metal pipe h-braces

Type of gates: 5-wire

A mandatory meeting is scheduled for September 16, 2026.

Expect at least an hour-long bid tour, meeting at the HSWCD office at 8:30 am.


ALL SEALED BIDS (MAILED, HAND-DELIVERED, Goss@harneyswcd.net), ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: **12:00 pm, on Wednesday, September 23, 2026**

Contents of bid packet must be returned with bid sheet.

Estimated Start Work Date: **October 1, 2026**

Contract Completion: **All units to be complete by May 1, 2027**


Falls Boundary Fence Building

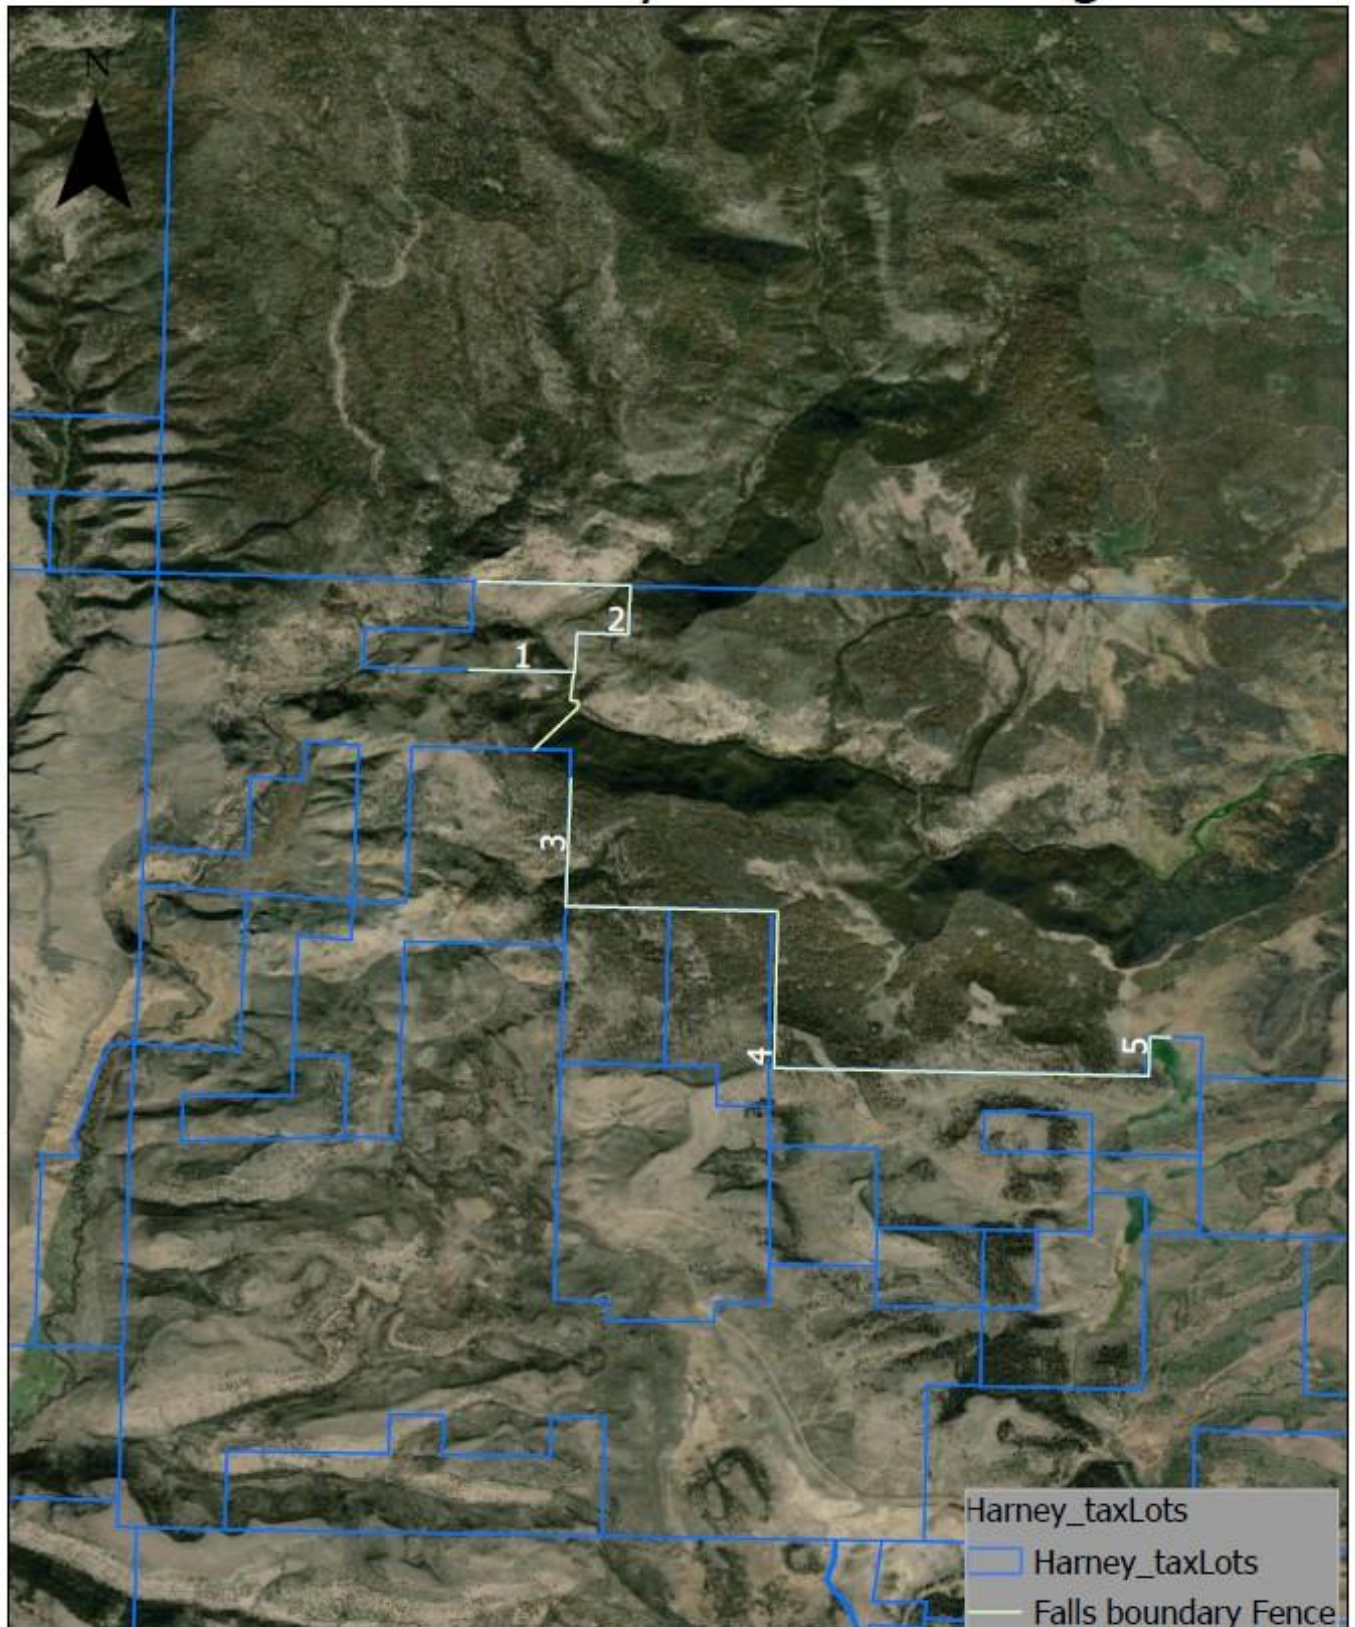

Harney CWMA
Tyler Goss
7/23/2026

0 0.8 1.6 3.2 Miles

Falls Boundary Fence Building

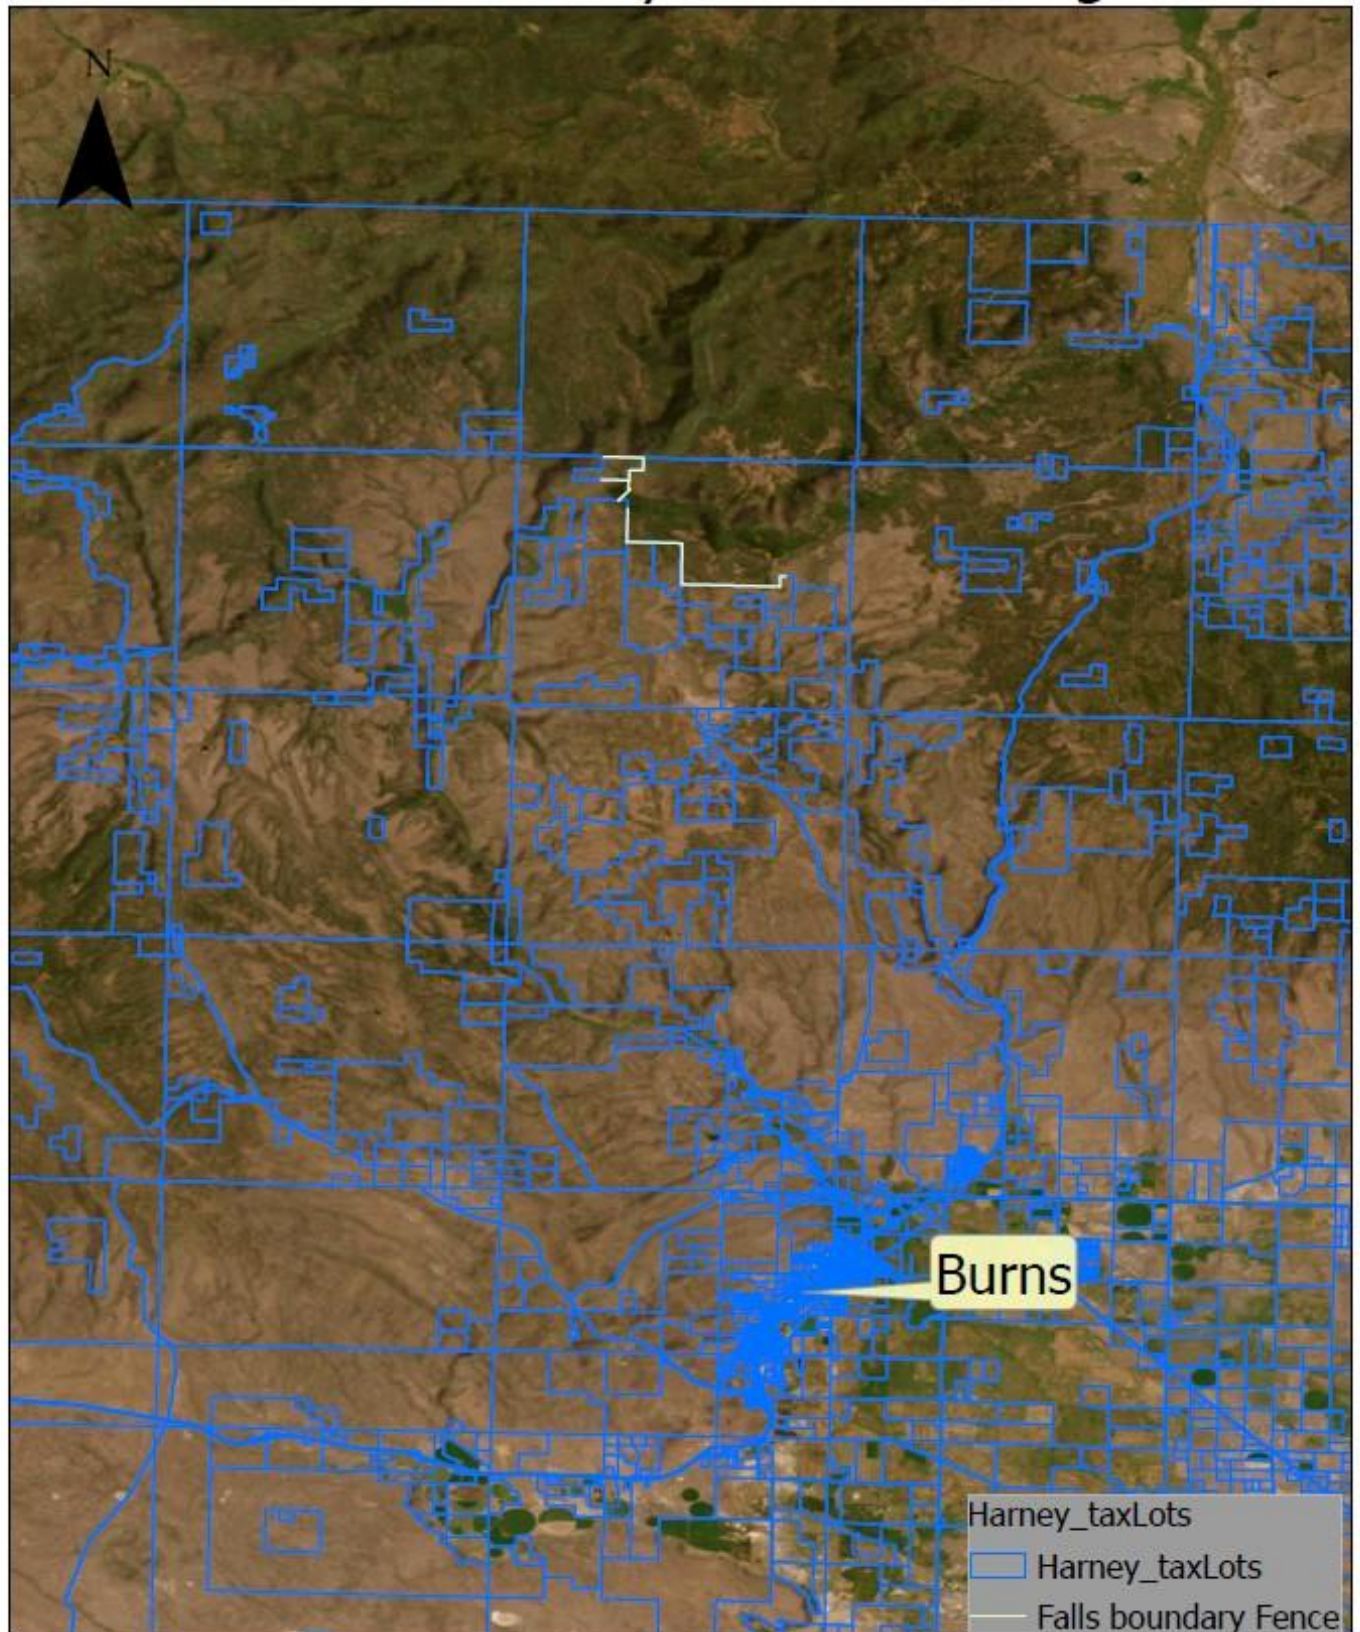

Bid Sheet
USFS Falls Fire Boundary Fence Building
Schedule of Items

Description	Gross	Unit	Unit	Total
Section			Price	Amount
1	0.49	Miles	\$ _____	\$ _____
2	2.11	Miles	\$ _____	\$ _____
3	0.82	Miles	\$ _____	\$ _____
4	3.74	Miles	\$ _____	\$ _____
5	0.35	Miles	\$ _____	\$ _____
Total Quote ALL or None	7.51	Miles		\$ _____

	Signature of Person Authorized to Sign	Date of Quotation
Contractor Name		
Street Address	Signer name (Type or Print)	Telephone
City/State/Zip	Title (Type or Print)	Email

REQUIRED ATTACHMENTS TO BE SUBMITTED WITH SEALED BID

- **Staffing Plan**--A list of employees that will be working at the proposed project site.
- **Past Performance Statement**--Provide (2) past performance references on your most recent comparable jobs. If any of those jobs listed were with the SWCD, please note the size and scope of each project.
- **Progress Payment Request**--Please specify if you wish to submit invoices for payment before the completion date.

ALL SEALED BIDS (MAILED OR HAND DELIVERED OR Goss@harneyswcd.net) ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: 12:00 pm on Thursday, September 23, 2026. Contents of bid packet must be returned with the bid sheet.

Estimated start work date: October 1, 2026

Contract Completion Time: All Units are to be complete by May 1, 2027