



BID PACKET
USFS Telephone Fire Internal Fencing

(Fence D)

October 2026





USFS Telephone Fire Internal Fencing

(Fence D)

October 2026

There sections of fence in the Telephone fire that need to be rebuild do to damage. All fences should be repaired due to age and fire damage. If we cannot fully repair it all, replace what we can and fix the remainder. There are some wooden post and H braces that have been burned, these sections must be replaced with “like material”. There are some down fences, and some weak wire that must be repaired to spec.

Access to the Work: See vicinity and project maps. ATV’s/UTV’s and skid steer are allowable for the purpose of fence construction. There is about 9.04 miles of fence total. All fence lines will be installed in the exact same spot. All old wire and unused posts must be removed from project. Contractor is allowed to reuse t-posts from existing fence. Contractor is responsible for purchasing all material.

Description of Work:

1. 9.04 miles of 4-wire all steel fence

Fence type: 4- Wire Fence, All Steel post

Wire spacing dimensions in inches above the ground:

D: 42"

C: 30"

B: 22"

A: 16"

Line posts spacing (L): 22 ft 0 inches

Type of mechanical gate closers: Pipe and Chain

Type of top wire: Barbed

Type of intermediate wires: Barbed

Type of bottom wire: Barbless

Length of steel posts: 5 ft 6 inches

Depth of steel posts in ground: 18 inches

Type of stress panels: Double steel post

Type of corner panels: rock crib or wooden h-braces

Type of gates: 5-wire

Type of stay: anything Except “twisty Stay”
Stay spacing: 7 ft 4 inches.

A mandatory meeting is scheduled for October 7th, 2026.

Expect at least an hour bid meeting at the HSWCD office at 8:30 am.

Contractor will be emailed a map during the meeting. Contractor will have freedom to check out the project on their own. **ATV or UTV is suggested not required.**


ALL SEALED BIDS (MAILED, HAND DELIVERED, Goss@harneyswcd.net), ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: 12:00 pm, On Wednesday, October 21, 2026

Contents of bid packet must be returned with bid sheet.

Estimated Start Work Date: **November 1st, 2026**

Contract Completion: **All units to be complete by May 1st, 2027**


USFS Telephone Fence D

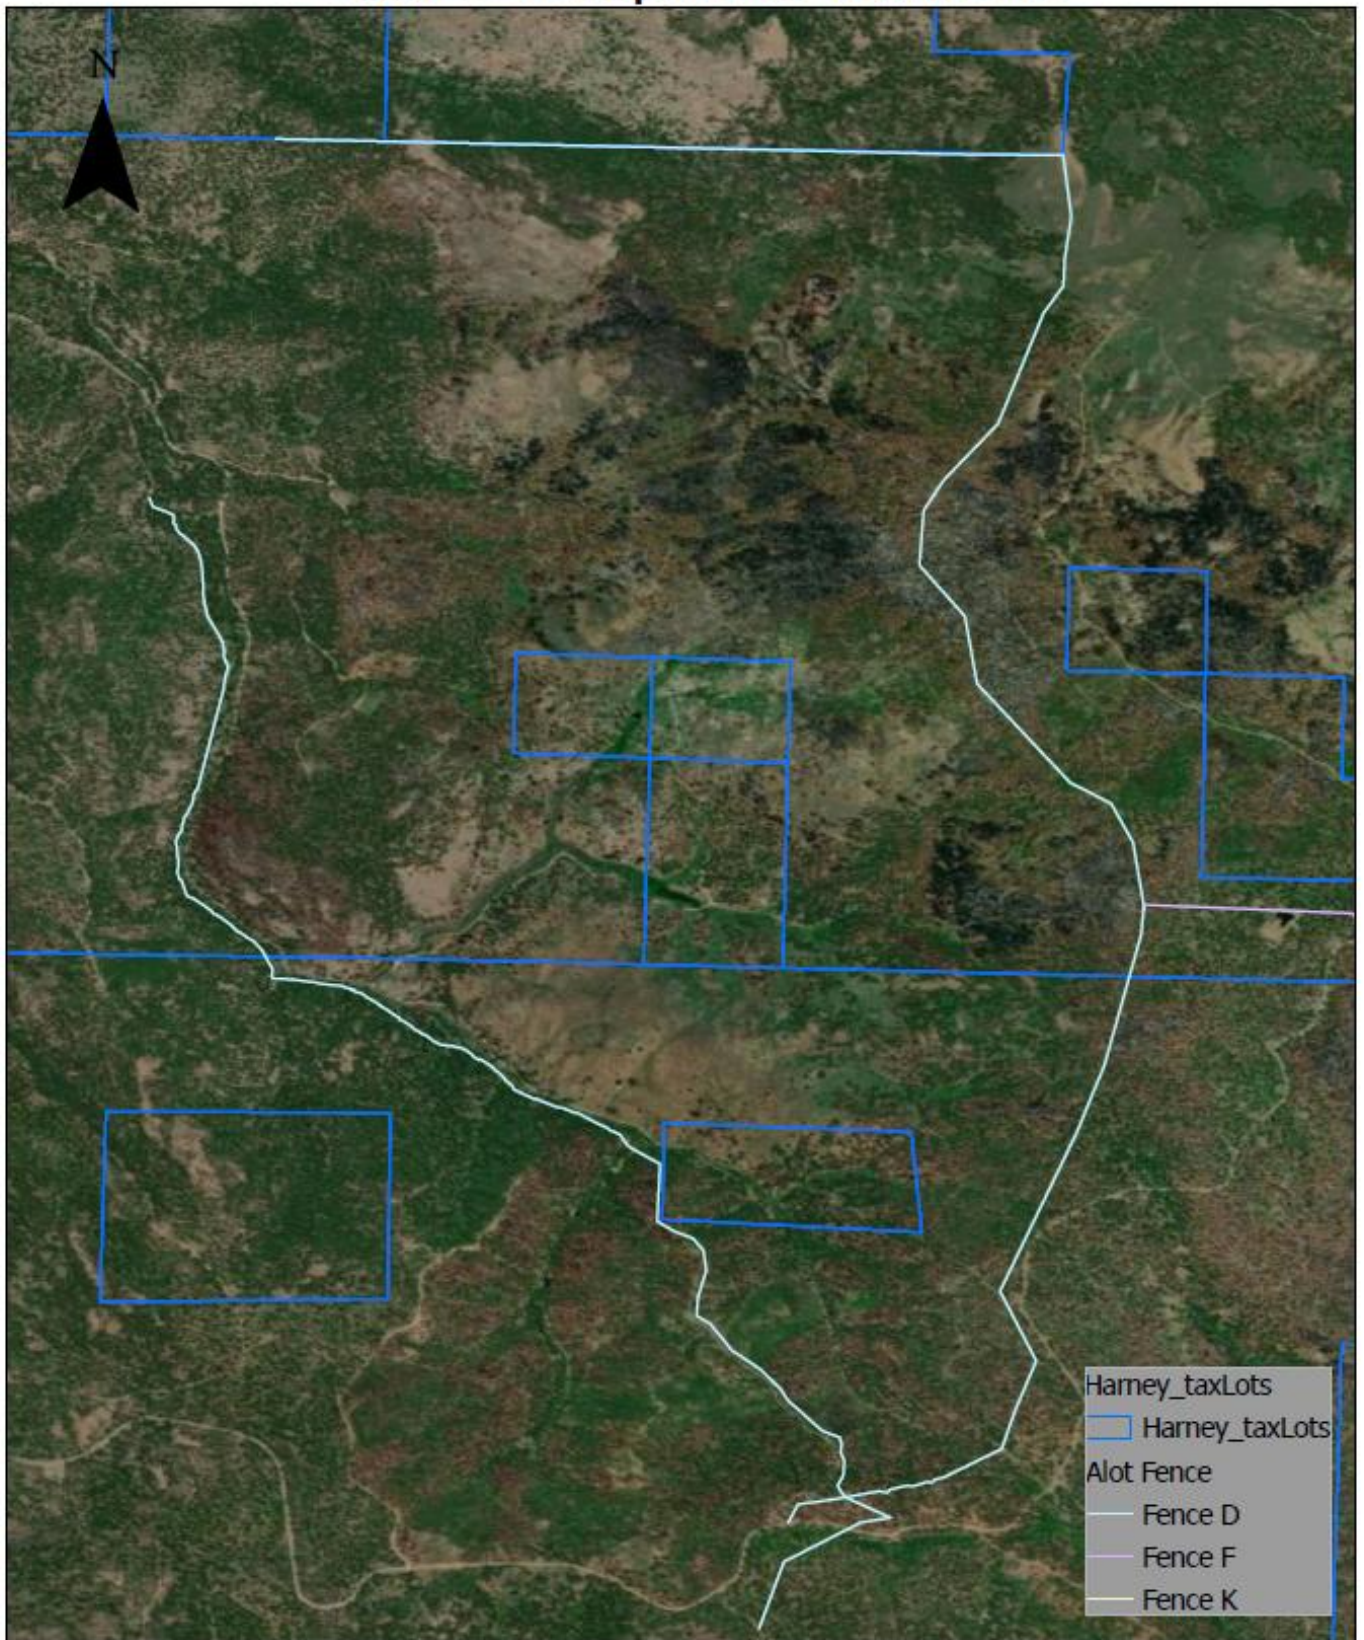

Harney CWMA
Tyler Goss
9/16/2026

0 0.32 0.63 1.26 Miles


USFS Telephone Fence D,F,K

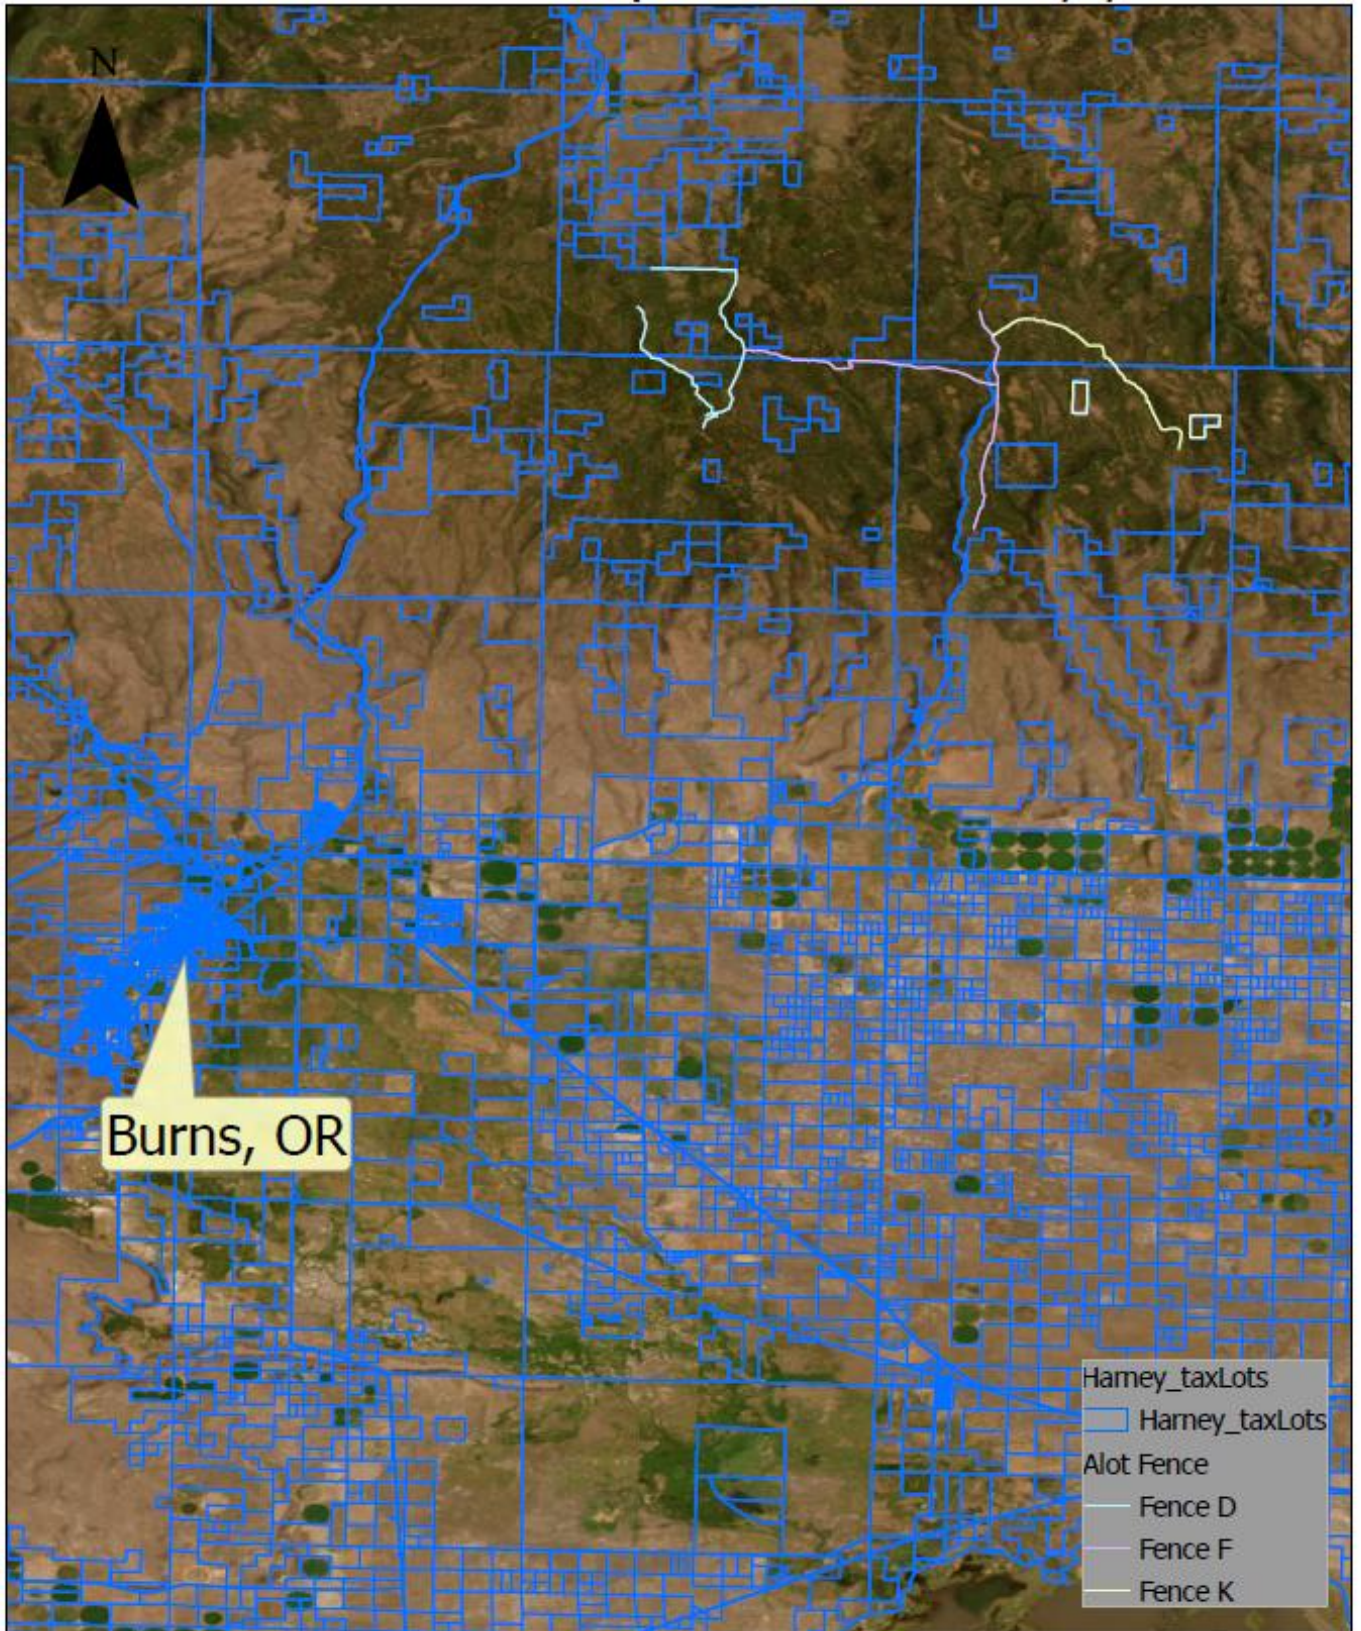

Harney CWMA
Tyler Goss
9/16/2026

0 2.95 5.9 11.8 Miles

USFS Telephone Fence D

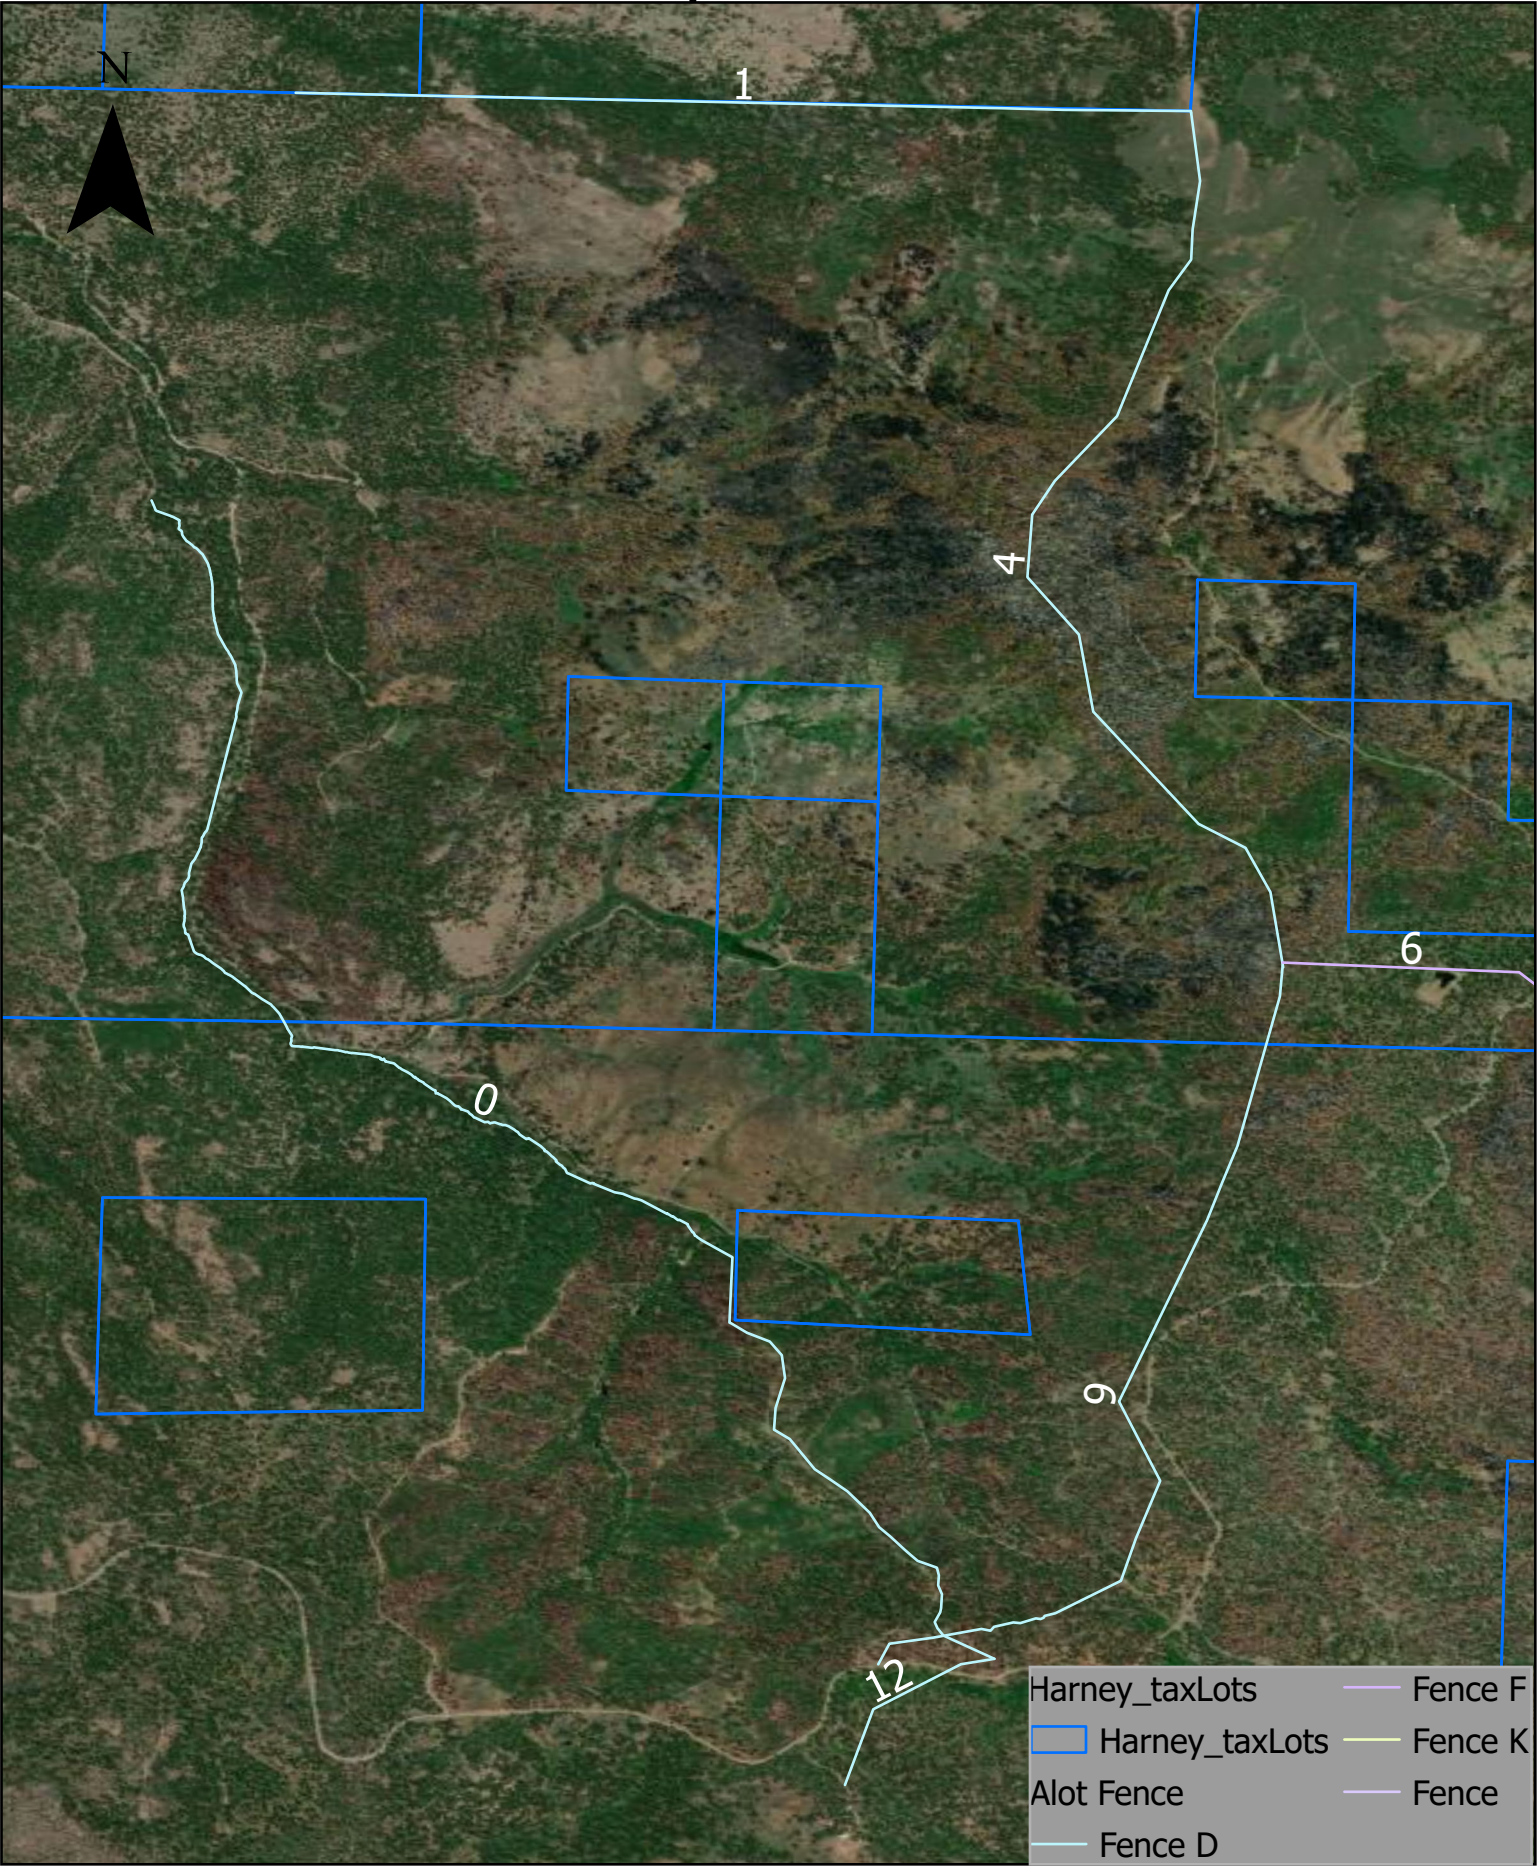

Bid Sheet
USFS Telephone Fire Internal
(Fence D)
Schedule of Items

Description	Gross	Unit	Unit	Total
Section			Price	Amount
0	3.29	Miles	\$ _____	\$ _____
1	1.43	Miles	\$ _____	\$ _____
4	2.05	Miles	\$ _____	\$ _____
9	1.87	Miles	\$ _____	\$ _____
12	0.40	Miles	\$ _____	\$ _____
Total Quote ALL or None	9.04	Miles		\$ _____

	Signature of Person Authorized to Sign		Date of Quotation
Contractor Name			
Street Address	Signer name (Type or Print)		Telephone
City/State/Zip	Title (Type or Print)	Email	

REQUIRED ATTACHMENTS TO BE SUBMITTED WITH SEALED BID

- **Staffing Plan**--A list of employees that will be working at the proposed project site.
- **Past Performance Statement**--Provide (2) past performance references on your most recent comparable jobs. If any of those jobs listed was with the SWCD, please make notation as to size and scope of each project.
- **Progress Payment Request**--Please specify if you wish to submit invoices for payment prior to final completion date.

ALL SEALED BIDS (MAILED OR HAND DELIVERED OR Goss@harneyswcd.net) ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: 12:00 pm on Wednesday, October 21, 2026. Contents of bid packet must be returned with the bid sheet.

Estimated start work date: November 1, 2026

Contract Completion Time: All Units are to be complete by May 1st, 2027