

HARNEY SOIL & WATER
CONSERVATION DISTRICT



BID PACKET
Falls Fire BLM Fence Building

(Project 2)

May 2026





Falls Fire BLM Fence Building (*Project 2*)

May 2026

There are multiple sections of fence in the Falls Fire that need to be replaced. All fences should be replaced due to age and fire damage. If we cannot fully replace it all, replace what we can and fix the remainder. There are some wooden posts and H braces that have been burned, some down fences, and some weak wire.

Access to the Work: See vicinity and project maps. ATVs/UTVs and skid steers are allowable for the purpose of fence construction. There is about 6.28 miles of fence total. All fence lines will go back to the exact same spot. All old wire and unused posts must be removed from the project. The contractor is allowed to reuse t-posts from the existing fence. The contractor is responsible for purchasing all material.

Description of Work:

1. **4.96 miles of 4-wire all steel fence**
2. **9 5-wire gates**

Fence type: 4- Wire Fence, All Steel post

Wire spacing dimensions in inches above the ground:

D: 42"

C: 30"

B: 22"

A: 16"

Line posts spacing (L): 22 ft 0 inches

Type of mechanical gate closers: Pipe and Chain

Type of top wire: Barbed

Type of intermediate wires: Barbed

Type of bottom wire: Barbless

Stay spacing: 7 ft 4 inches.

Length of steel posts: 5 ft 6 inches

Depth of steel posts in ground: 18 inches

Type of stress panels: Double steel post

Type of corner panels: rock crib or metal pipe h-braces

Type of gates: 5-wire

A mandatory bid tour is scheduled for May 21st, 2026.

Expect at least an hour bid tour, meeting at the HSWCD office at 8:30 am.


ALL SEALED BIDS (MAILED, HAND DELIVERED, OR EMAILED), ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY 12:00 pm, on Thursday, May 28th, 2026

Contents of the bid packet must be returned with bid sheet.

Estimated Start Work Date: **June 1, 2026**

Contract Completion: **All units to be complete by August 1, 2026**


Falls Fire Fencing Project 2

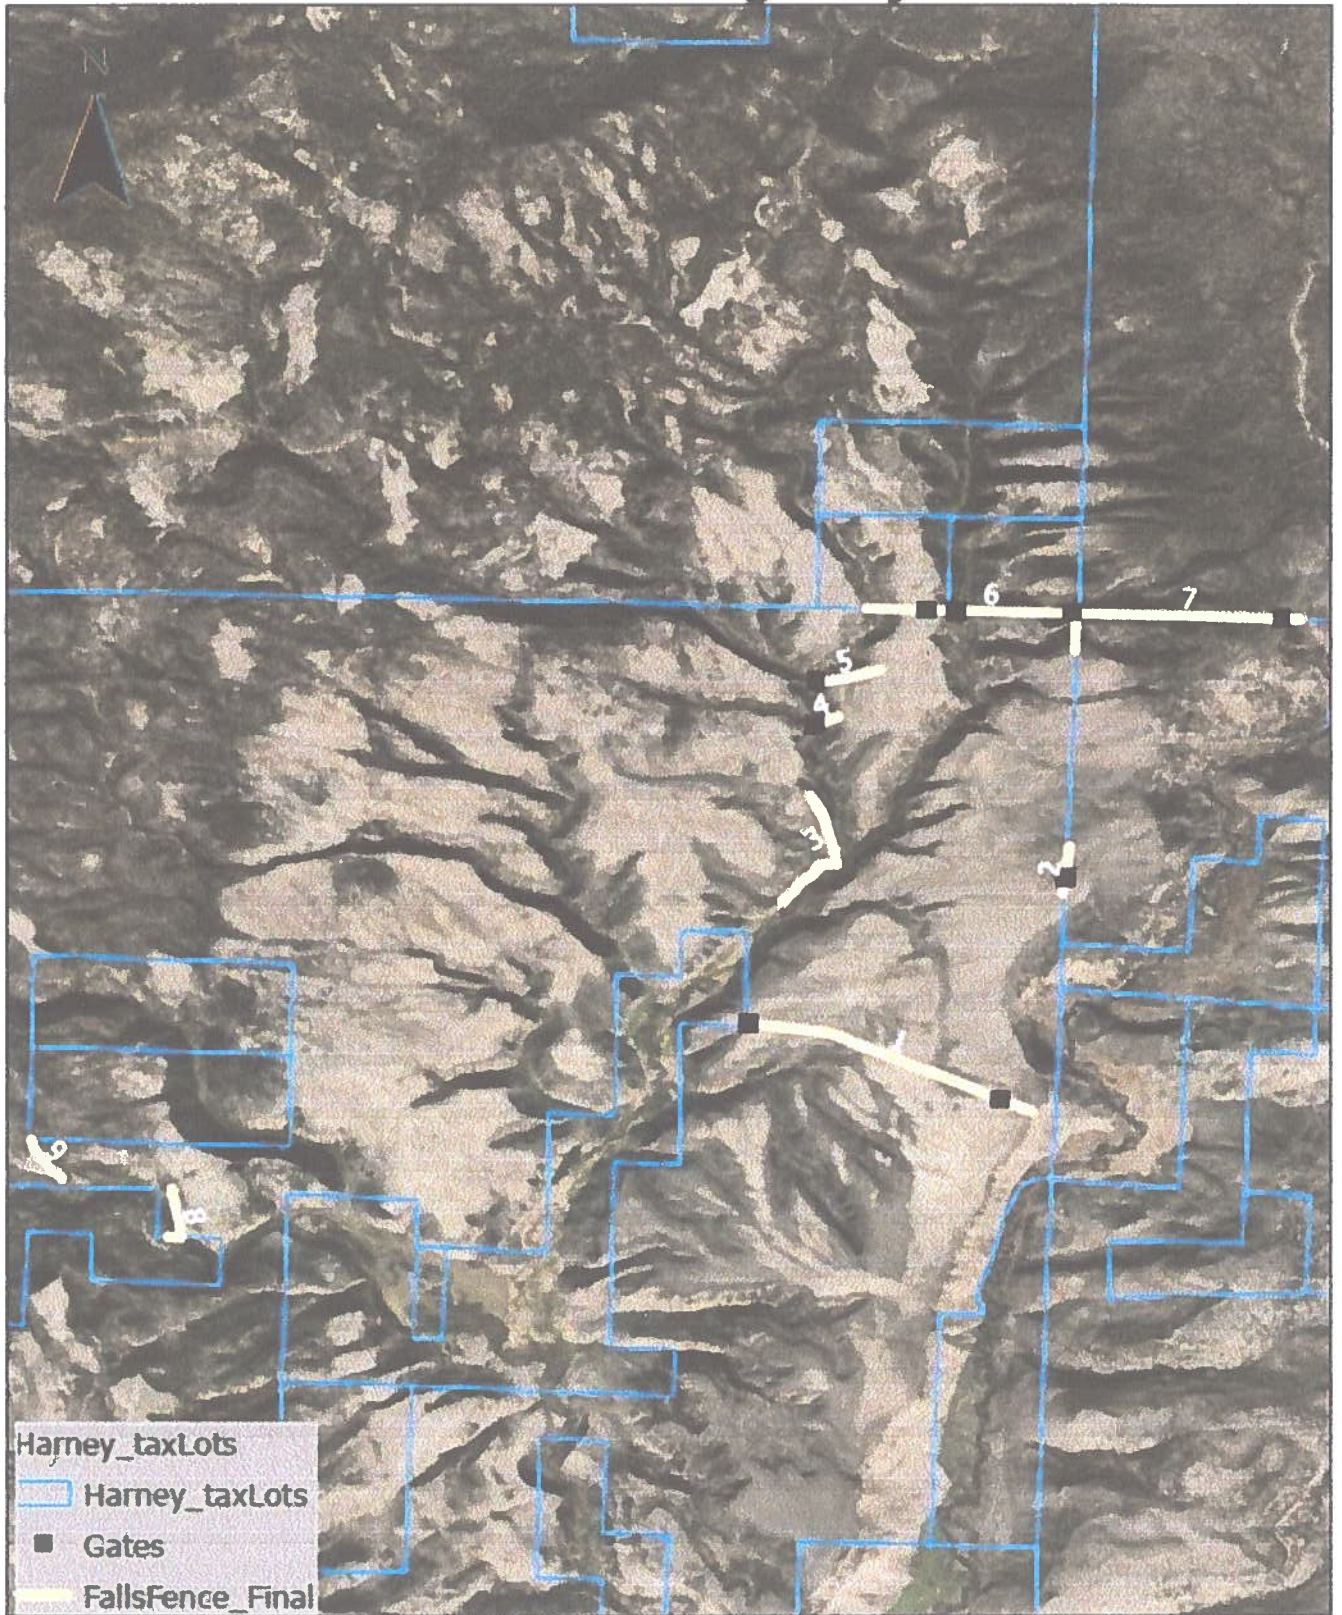

Harney CWMA
Tyler Goss
5/11/2026

0 0.68 1.35 2.7 Miles

Falls Fire Fence Project 2

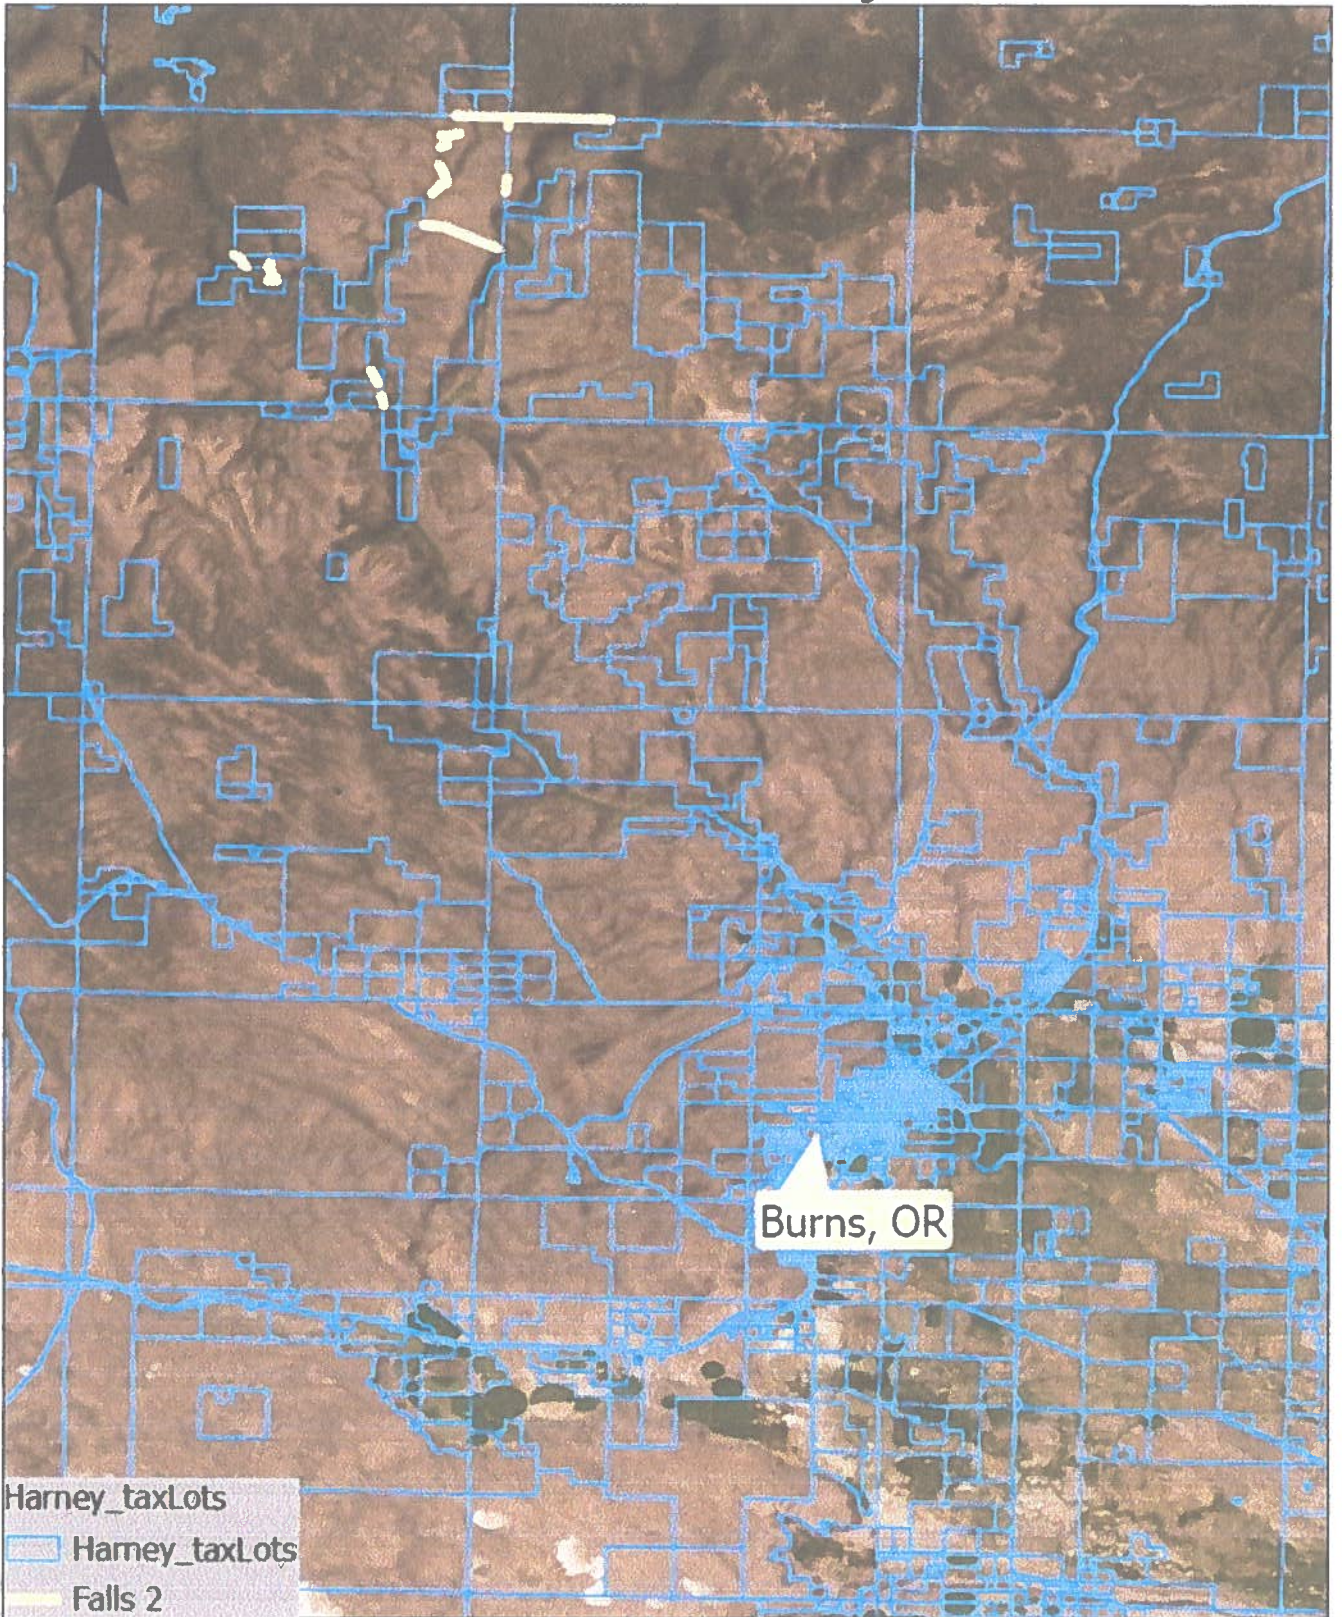

Harney CWMA
Tyler Goss
5/11/2026



Bid Sheet
Falls Fire Fence Building (Project 2)
Schedule of Items

Description	Gross	Unit	Unit	Total
Section			Price	Amount
1	1.19	Miles	\$ _____	\$ _____
2	0.25	Miles	\$ _____	\$ _____
3	0.71	Miles	\$ _____	\$ _____
4	0.10	Miles	\$ _____	\$ _____
5	0.27	Miles	\$ _____	\$ _____
6	1.01	Miles	\$ _____	\$ _____
7	0.85	Miles	\$ _____	\$ _____
8	2.31	Miles	\$ _____	\$ _____
9	0.25	Miles	\$ _____	\$ _____
Total Quote ALL or None	4.96	Miles		\$ _____

	Signature of Person Authorized to Sign	Date of Quotation
Contractor Name		
Street Address	Signer name (Type or Print)	Telephone
City/State/Zip	Title (Type or Print)	Email

REQUIRED ATTACHMENTS TO BE SUBMITTED WITH SEALED BID


- **Staffing Plan**--A list of employees who will be working at the proposed project site.
- **Past Performance Statement**--Provide (2) past performance references on your most recent comparable jobs. If any of those jobs listed were with the SWCD, please make a notation as to size and scope of each project.
- **Progress Payment Request**--Please specify if you wish to submit invoices for payment prior to final completion date.

ALL SEALED BIDS (MAILED OR HAND DELIVERED OR EMAILED) ARE DUE TO THE HARNEY SOIL AND WATER CONSERVATION OFFICE BY: 12:00 pm on Thursday, May 28, 2026. Contents of bid packet must be returned with the bid sheet.

Estimated start work date: June 1, 2026

Contract Completion Time: All Units are to be completed by August 1, 2026

Falls Fire Fencing Project 2

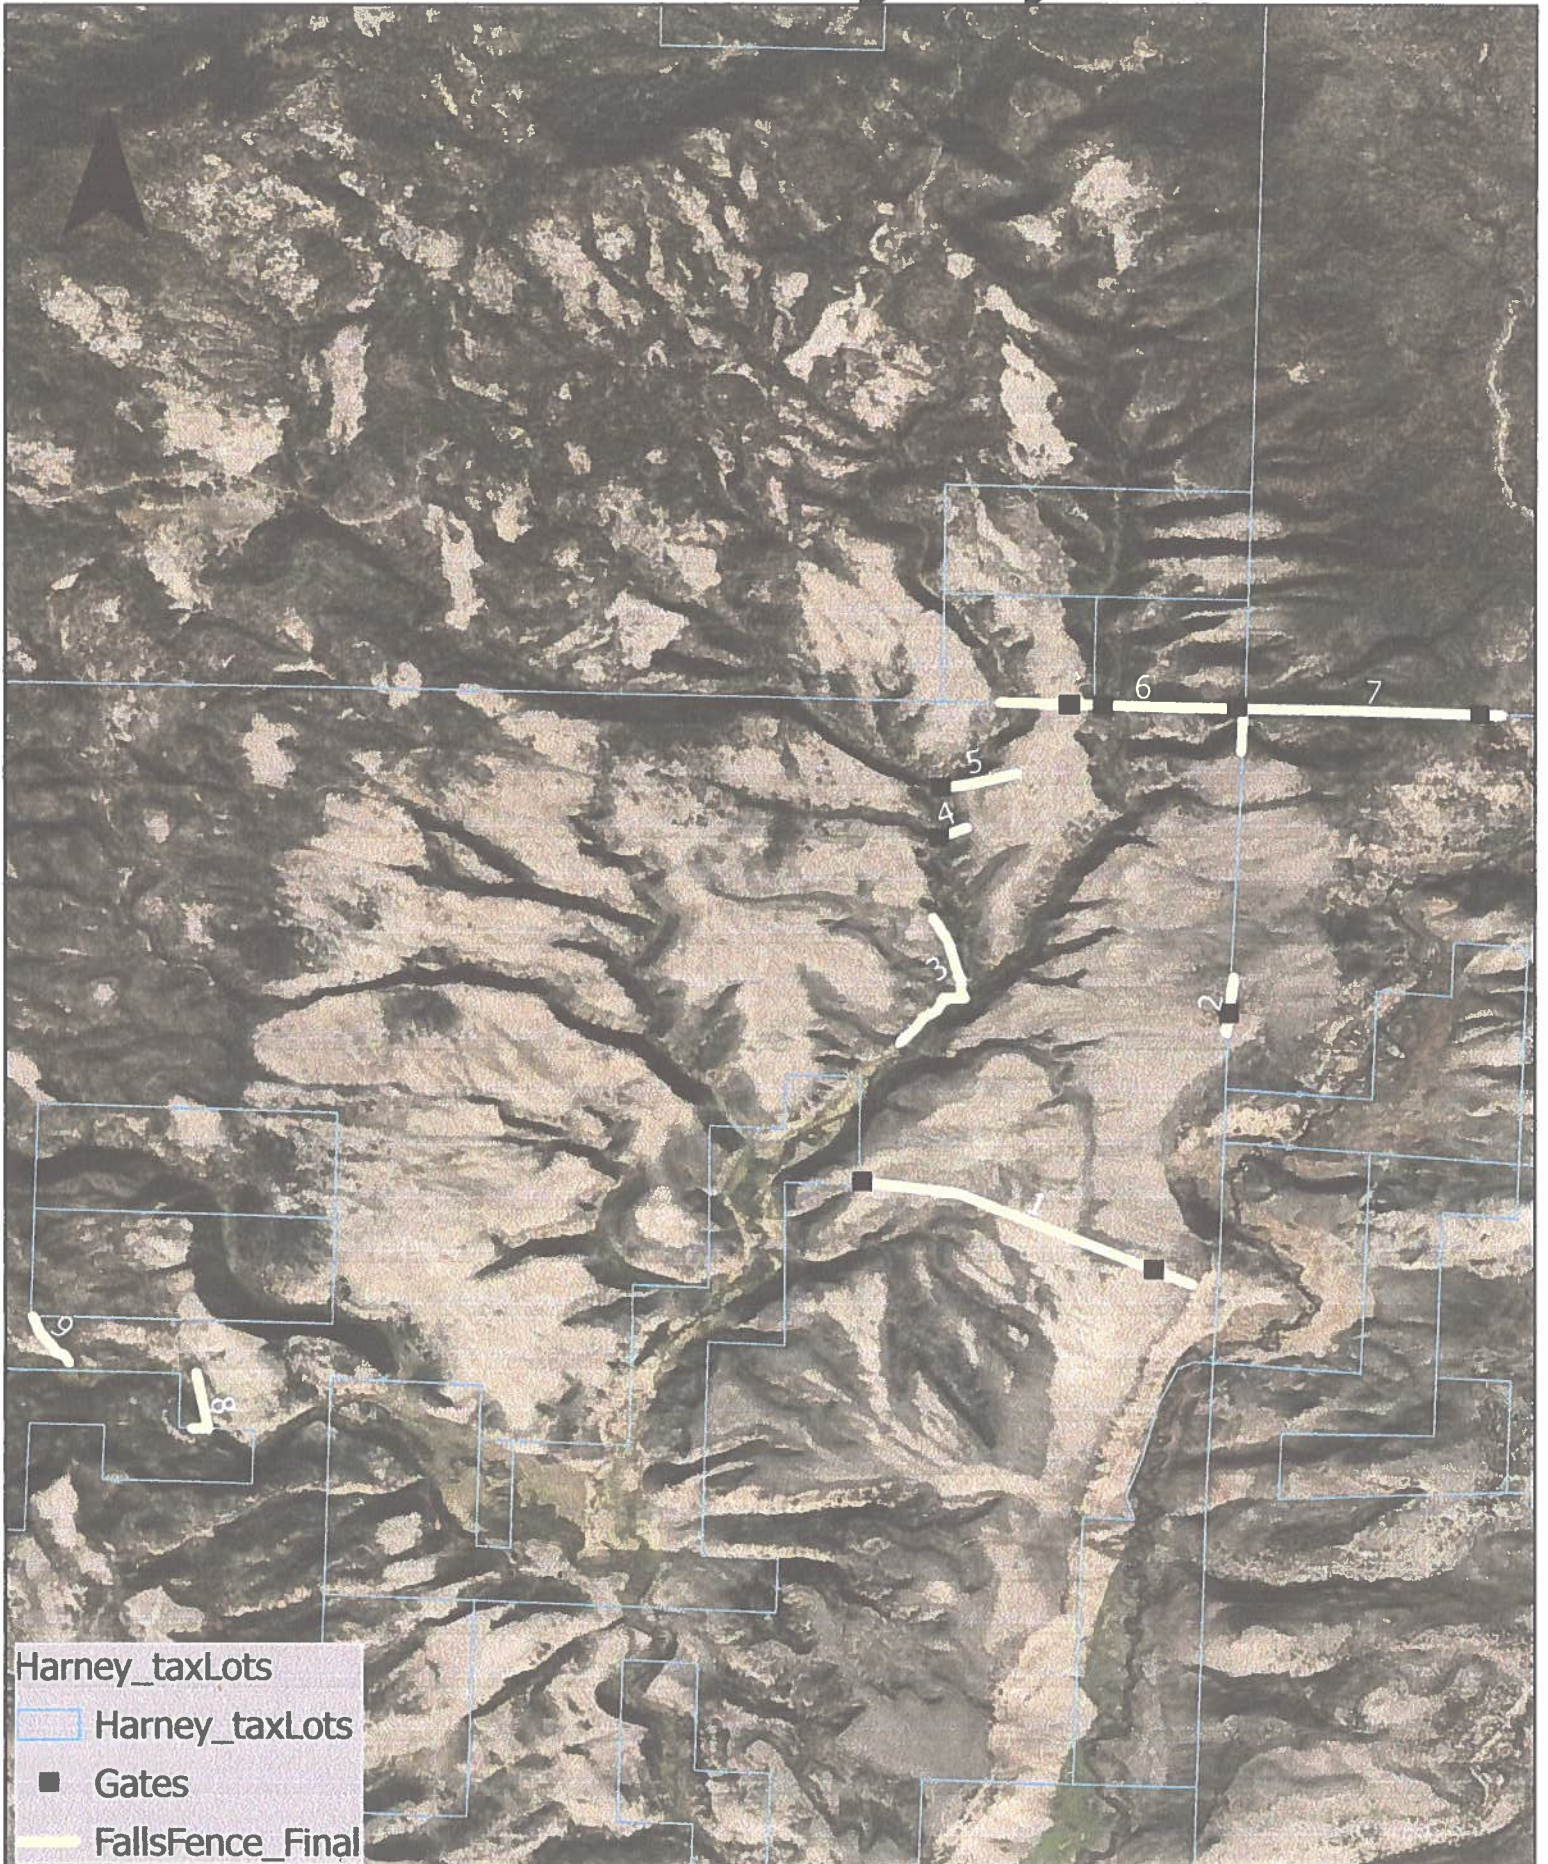

- Harney_taxLots
- Harney_taxLots
- Gates
- FallsFence_Final

Harney CWMA
Tyler Goss
5/11/2026

